



Amazon™

MOISTURE RESISTANT MINERAL FIBER CEILING PANELS



CEILING PANELS DESIGNED TO WITHSTAND NON-AIR CONDITIONED BUILDING SPACE.

- Suitable for installation in temperatures up to 120°F & 99%RH
- Class "A" Flame Spread
- Reveal Edge Detail
- Standard Size / Thickness 24" x 24" x 5/8"
- Durable, High-Density Composition
- Acoustical Ratings: NRC .50 / CAC 35
- Environmentally Friendly - ISO 14001 Certified
- Excellent Quality - ISO 9001 Certified

MULTIPLE APPLICATION CONSIDERATIONS:

- School classrooms vacant during summer
- Office/retail space subject to periodic vacancy
- Hotel hallways
- Athletic facilities
- Auditoriums, Churches, ect.
- Industrial buildings




STANDARD FEATURE: Reveal Edge Detail

10 YEAR

**120°F/99%RH
LIMITED WARRANTY**

Against visible sag
from DAIKEN
Corporation

SAG

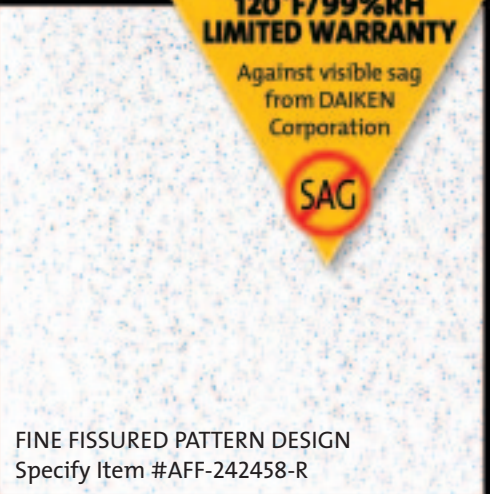

FINE FISSURED PATTERN DESIGN
Specify Item #AFF-242458-R

About Daiken Corporation

Headquartered in Osaka, Japan, Daiken Corporation is a leading manufacturer of high quality building materials. With annual sales of approximately \$1.5 Billion USD, Daiken products are installed every day in a wide range of commercial, residential, and industrial projects throughout the worldwide markets. The company manufactures a comprehensive line of mineral ceiling panels featuring high-performance technology, along with many unique designs and patterns for multiple applications. All Daiken ceiling products are environmentally friendly and manufactured to ISO 1900 certified quality standards. Daiken products are marketed in North America by Globalnex, Inc.



PRODUCT SPECIFICATION DETAILS

ACOUSTICAL CEILING SYSTEMS 09500

PART 2: PRODUCTS

2.1 GENERAL

Provide Acoustical Ceiling Material manufactured to meet requirements of this specification in accordance with ASTM E 1264 [Federal Specification SS-S-118b].

2.2 MATERIALS

Acoustical Ceiling Units:

1. Type III
2. Form 2
3. Pattern [CD]
4. [Non-directional fine fissured] and perforated wet-felted lay-in panels
5. Size [5/8"] thick x [24" x 24"]
6. Edge Detail [Reveal]
7. Noise Reduction Coefficient (NRC) [.50]
8. Ceiling Attenuation Class (CAC) [35]
9. Light Reflectance Coefficient (LR) [.75]
Light Reflectance Designation LR-1
10. Color White
11. Flame Spread Classification Class A
12. Manufacturer, subject to compliance with requirements of this specification, Daiken.
13. Product Name Daiken [Amazon Fine Fissured]

PLEASE NOTE - While Daiken "Amazon" ceiling panels offer excellent performance in extremely high temperature and humidity conditions, they are classified as interior finish products and are not recommended for exterior applications or installation over chlorinated/chemically treated indoor swimming pools.



Distributed By

ORLANDO

4656 34TH ST. SW.
ORLANDO, FL 32811
PH: (407) 425-3467
FAX: (407) 422-6502

CLEARWATER

12350 S. BELCHER ROAD
LARGO, FL 33773
PH: (727) 531-7774
FAX: (727) 539-7596

COCOA

426 GUS HIPP BLVD.
ROCKLEDGE, FL 32955
PH: (407) 636-4042
FAX: (407) 636-4087

FORT MYERS

3620 WORK DRIVE
FORT MYERS, FL 33916
PH: (941) 332-1610
FAX: (941) 332-2796

GAINESVILLE

14100 N.W. 126 TERRACE
ALACHUA, FL 32615
PH: (386) 462-9900
FAX: (386) 462-9901

JACKSONVILLE

6959 STUART AVE.
JACKSONVILLE, FL 32254
PH: (904) 781-9355
FAX: (904) 781-9639

MIAMI

9330 N.W. 100TH
ST. MEDLEY, FL 33178
PH: (305) 887-1007
FAX: (305) 884-4175

PENSACOLA

570 HEINBERG STREET
PENSACOLA, FL 32501
PH: (850) 434-0264
FAX: (850) 434-1386

TALLAHASSEE

2802 PLANT STREET
TALLAHASSEE, FL 32304
PH: (850) 576-0102
FAX: (850) 575-7009

TAMPA

6704 N. 54TH ST.
TAMPA, FL 33610-1912
PH: (813) 620-0718
FAX: (813) 628-4310

WEST PALM BEACH

525 GATOR DRIVE
LANTANA, FL 33462
PH: (561) 585-8010
FAX: (561) 585-1151

TEXAS

505 W. 38TH ST.
HOUSTON, TX 77018
PH: (713) 692-6290
FAX: (713) 692-3623

TENNESSEE

616 SPACE PARK DRIVE
NASHVILLE, TN 37211
PH: (615) 781-8682
FAX: (615) 781-0027

NORTH CAROLINA-RALEIGH

1113 TRANSPORT DRIVE
RALEIGH, NC 27603
PH: (919) 771-2255
FAX: (919) 771-2290

NORTH CAROLINA-CHARLOTTE

2011 CROSS BEAM DRIVE
CHARLOTTE, NC 28217
PH: (704) 424-9766
FAX: (704) 424-9767

WARRANTY FOR AMAZON CEILINGS

DAIKEN CORPORATION warrants that "AMAZON EXCEL-TONE MR" Mineral Fiber Ceiling Board in thickness of 5/8" & 3/4" shall have neither sagging nor warping over allowable limits and it is warranted to be free of defects directly attributed to the manufacturing faults for the period of 10 years from the date of installation of ceiling board as long as the material is installed and maintained under the conditions set forth below: Size and pattern should be inquired to Daiken Corporation, International Trade Division Tokyo.

1. The ceiling board shall be installed by an approved ceiling contractor by us in compliance with Daiken's specifications and installation conditions.
2. Installation shall be done in areas free from excessive humidity, chemical fumes, freezing temperature and vibration.
3. Installation shall be done under the conditions of the temperature and relative humidity ranges 10 to 120°F and 0 to 99% respectively. After the installation, the environmental conditions shall be controlled within the said limits.
4. The ceiling board shall not be affected with direct moisture such as leaks or condensation during and after installation.
5. The ceiling board shall not be used to support any other materials.
6. The ceiling board shall be mechanically suspended properly and shall not be cemented nor glued to the surface of any other materials.
7. Prior to installation the ceiling board shall be stored in a dry and clean area, enclosed and protected from possible damages by rain, snow, and excessive moisture, and also protected from possible impacts and kept at least ten feet off walls. Stack the ceiling boards flat on the floor level with protective panels or sheets between the ceiling boards and the floor.

In spite of the observance of the above conditions, should there be any sagging or warping, it must be informed in a written notice to Daiken Corporation, International Trade Division in Tokyo within 30 days after first observed such fact. After inspection and survey of the case and recognized, Daiken Corporation shall furnish new material for replacement in the same or similar specification and the equal quantity which is acknowledged by Daiken Corporation to be sagged or warped.

The furnishing of such ceiling board for the replacement shall constitute the total liability of Daiken Corporation, and Daiken Corporation shall not be responsible for any installation or replacement costs, or for incidental or consequential damages of any nature whatsoever.

DAIKEN PRODUCTS ARE MARKETED IN NORTH AMERICA
BY



GLOBALNEX
WHAT'S NEXT IN CONSTRUCTION MATERIALS

GLOBALNEX, INC.

200 SOUTH HOOVER BLVD. BUILDING #215
TAMPA, FLORIDA 33609
TELEPHONE: 813-287-8218 • FAX: 813-287-8144
WWW.GLOBALNEX.COM

PRODUCT SPECIFICATION DETAILS

ACOUSTICAL CEILING SYSTEMS 09500

PART 2: PRODUCTS

2.1 GENERAL

Provide Acoustical Ceiling Material manufactured to meet requirements of this specification in accordance with ASTM E 1264 [Federal Specification SS-S-118b].

2.2 MATERIALS

Acoustical Ceiling Units:

1. Type III
2. Form 2
3. Pattern [CD]
4. [Non-directional fine fissured] and perforated wet-felted lay-in panels
5. Size [5/8"] thick x [24" x 24"]
6. Edge Detail [Reveal]
7. Noise Reduction Coefficient (NRC) [.50]
8. Ceiling Attenuation Class (CAC) [35]
9. Light Reflectance Coefficient (LR) [.75]
Light Reflectance Designation LR-1
10. Color White
11. Flame Spread Classification Class A
12. Manufacturer, subject to compliance with requirements of this specification, Daiken.
13. Product Name Daiken
[Amazon Fine Fissured]

PLEASE NOTE - While Daiken "Amazon" ceiling panels offer excellent performance in extremely high temperature and humidity conditions, they are classified as interior finish products and are not recommended for exterior applications or installation over chlorinated/chemically treated indoor swimming pools.

WARRANTY FOR AMAZON CEILINGS

DAIKEN CORPORATION warrants that "AMAZON EXCEL-TONE MR" Mineral Fiber Ceiling Board in thickness of 5/8" & 3/4" shall have neither sagging nor warping over allowable limits and it is warranted to be free of defects directly attributed to the manufacturing faults for the period of 10 years from the date of installation of ceiling board as long as the material is installed and maintained under the conditions set forth below: Size and pattern should be inquired to Daiken Corporation, International Trade Division Tokyo.

1. The ceiling board shall be installed by an approved ceiling contractor by us in compliance with Daiken's specifications and installation conditions.
2. Installation shall be done in areas free from excessive humidity, chemical fumes, freezing temperature and vibration.
3. Installation shall be done under the conditions of the temperature and relative humidity ranges 10 to 120°F and 0 to 99% respectively. After the installation, the environmental conditions shall be controlled within the said limits.
4. The ceiling board shall not be affected with direct moisture such as leaks or condensation during and after installation.
5. The ceiling board shall not be used to support any other materials.
6. The ceiling board shall be mechanically suspended properly and shall not be cemented nor glued to the surface of any other materials.
7. Prior to installation the ceiling board shall be stored in a dry and clean area, enclosed and protected from possible damages by rain, snow, and excessive moisture, and also protected from possible impacts and kept at least ten feet off walls. Stack the ceiling boards flat on the floor level with protective panels or sheets between the ceiling boards and the floor.

In spite of the observance of the above conditions, should there be any sagging or warping, it must be informed in a written notice to Daiken Corporation, International Trade Division in Tokyo within 30 days after first observed such fact. After inspection and survey of the case and recognized, Daiken Corporation shall furnish new material for replacement in the same or similar specification and the equal quantity which is acknowledged by Daiken Corporation to be sagged or warped.

The furnishing of such ceiling board for the replacement shall constitute the total liability of Daiken Corporation, and Daiken Corporation shall not be responsible for any installation or replacement costs, or for incidental or consequential damages of any nature whatsoever.

DAIKEN PRODUCTS ARE MARKETED IN NORTH AMERICA
BY



GLOBALNEX
WHAT'S NEXT IN CONSTRUCTION MATERIALS

GLOBALNEX, INC.

200 SOUTH HOOVER BLVD. BUILDING #215
TAMPA, FLORIDA 33609
TELEPHONE: 813-287-8218 • FAX: 813-287-8144
WWW.GLOBALNEX.COM